

LED SERIES LIGHTHEADS



RECT25 Low-Profile Series

LED Lightheads with Programmable Flasher

The iLED™ RECT-25 is the first of TOMAR's new Low-Profile series. Designed using the latest in LED technology, the RECT-25 is unsurpassed in brightness and light distribution. The RECT-25 is available in High Power, Standard Power and Low Current configurations and has 11 different flash rates. Standard flange mounting or optional rail mounting is available.

- high efficiency TIR technology
- standard flange or optional rail mount
- internal/external mounting
- super-wide angle for superior off-axis visibility
- 11 different flash rates
- available in amber, blue, red and white



RECT25CLSHPB-R

Ordering Information

Please specify lens colors and model number when ordering. Available clear lens LED colors are amber, blue, red and white. Colored lenses available in amber, blue and red.

Aluminum Finish	Black Finish	Description
Model No.	Model No.	
RECT25LSHP	RECT25LSHPB	12-LED High power iLED™, clear lens, standard flange mount
RECT25LSSD	RECT25LSSDB	9-LED Standard power iLED™, clear lens, standard flange mount
RECT25LSLC	RECT25LSLCB	6-LED Low current iLED™, clear lens, standard flange mount
RECT25CLSHP	RECT25CLSHPB	12-LED High power iLED™, colored lens, standard flange mount
RECT25CLSSD	RECT25CLSSDB	9-LED Standard power iLED™, colored lens, standard flange mount
RECT25CLSLC	RECT25CLSLCB	6-LED Low current iLED™, colored lens, standard flange mount
RECT25LSRHP	RECT25LSRHPB	12-LED High power iLED™, clear lens, rail mount
RECT25LSRSD	RECT25LSRSDB	9-LED Standard power iLED™, clear lens, rail mount
RECT25LSRLC	RECT25LSRLCB	6-LED Low current iLED™, clear lens, rail mount
RECT25CLSRHP	RECT25CLSRHPB	12-LED High power iLED™, colored lens, rail mount
RECT25CLSRSD	RECT25CLSRSDB	9-LED Standard power iLED™, colored lens, rail mount
RECT25CLSRLC	RECT25CLSRLCB	6-LED Low current iLED™, colored lens, rail mount

RECT25 Low-Profile LED Lighthead

Standard Flange Mount




Rail Mount




Standard Flange Mount

Front View

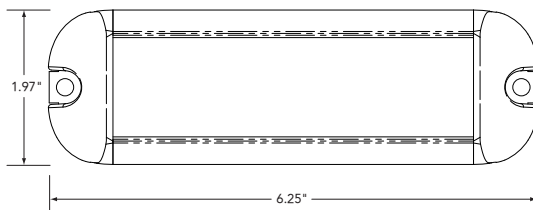


Side View




Rail Mount

Front View

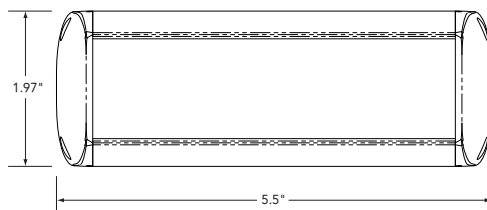

Side View



Specifications

Item	Description
Size (standard mount)	6.25" wide x 1.97" high x 1.36" deep (158.8mm x 50mm x 34.5mm)
Size (rail mount)	5.5" wide x 1.97" high x 1.36" deep (139.7mm x 50mm x 34.5mm)
Current Draw	12 LED unit: 1.6A avg. 9 LED unit: 1.2A avg. 6 LED unit: 0.8A avg.
Operating Temperature	-55°C - +65°C

Sharp Communication, Inc. • 3403 Governors Drive • Huntsville, AL 35805
800.548.2484 • 256.533.2484 • www.SharpCom.com